


TPHD460S

79086S User Manual

TEK TPHD-460S

HDMI 1.4 Extender with Ethernet & RS-232

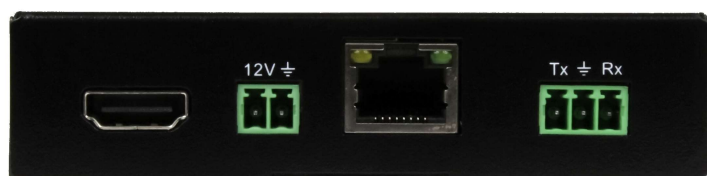

All Rights Reserved

Version: TPHD460S_2020V1.0

TPHD460S

79086S User Manual

Safety Precautions

To ensure the best performance from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully, and save the original box and packing material for possible future shipment
- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons
- Do not dismantle the housing or modify the module (electrical shock or burn hazard)
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction
- Refer all servicing to qualified service personnel
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water
- Do not put any heavy items on the product's power cable
- Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards
- Install the device in a place with sufficient ventilation to avoid damage caused by overheating
- Keep the module away from liquids
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Do not twist or pull by force ends of the cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes

TPHD460S

79086S User Manual

Table of Contents

1. Product Introduction	4
2. Features	4
3. Package List	4
4. Panel Description	5
4.1 Transmitter	5
4.2 Receiver	6
5. Specifications	7

TPHD460S

79086S User Manual

1. Product Introduction

The HDMI 1.4 Extender consists of a transmitter and a receiver. It can extend 4K or 1080p video to distance up to 328 feet (100 meters) over a single CAT cable. It supports bi-directional RS-232 pass-through control and Ethernet extension. 36V PoC feature allows the transmitter can be powered by the receiver and only one power adapter is needed in system.

2. Features

- Supports HDMI 1.4 and the HDMI video resolution up to 4K@60Hz 4:2:0
- Supports HDCP bypass and HDCP 2.2 compliant
- Extends 4K or 1080p video signals to distances up to 328 feet (100 meters) over a single CAT cable
- Bi-directional RS-232 pass-through control and Ethernet extension
- Provides up to 36W power for 3rd party device (e.g. HD Camera) on transmitter
- Cascaded to switcher or matrix by HDMI output of receiver
- Supports video source input for real-time HD monitoring
- Supports 36V PoC, allowing the transmitter to be powered by the receiver

3. Package List

- | | |
|---|--------------------------------------|
| • 1x Transmitter | • 1x Receiver |
| • 2x TX Mounting Ears with 2x screws | • 2x RX Mounting Ears with 2x screws |
| • 4x TX plastic cushions | • 4x RX plastic cushions |
| • 1x RS-232 Cable (3-pin to 8-pin Mini-DIN) | • 1x RS-232 Cable (3-pin to DB-9) |
| • 2x 3-pin terminal blocks | • 1x 2-pin terminal block |
| • 1x Power Adapter (DC 24V, 2.71A) | • 1x Power Cord |
| • 1x Power Cord (2-pin to 5.5x3.0mm jack) | • 1x User Manual |


Note: Please contact your distributor immediately if any damage or defect in the components is found.

TPHD460S

79086S User Manual

4. Panel Description

4.1 Transmitter

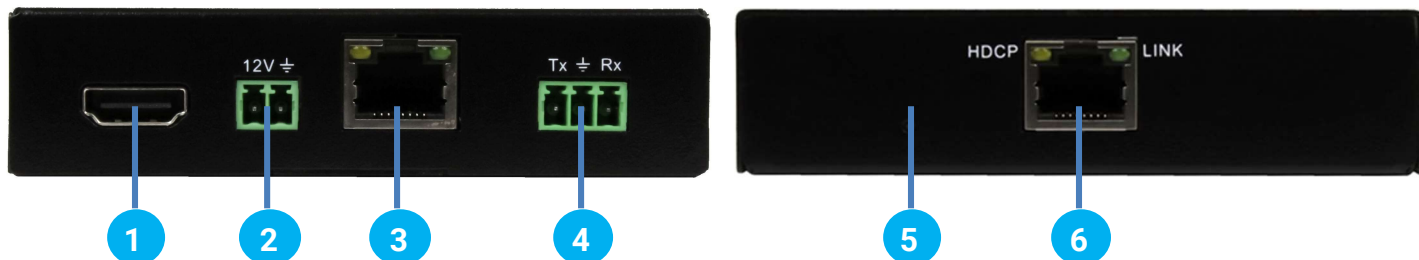


1. **HDMI IN:** Connects to HDMI source device
2. **CAM 12V:** Provides 12V, 3A power for source device (e.g. camera)
3. **Ethernet:** Used for Ethernet extension together with the Ethernet port of the receiver. If one Ethernet port is connected to a router, the other is able to access the LAN network
4. **RS-232:** Connects to the source device (e.g. camera) to be controlled by a far-end control device, or connects a control device (e.g. PC) control a far-end display device (e.g. projector)
5. **Power LED:** Illuminates green when power is applied
6. **HDBaseT Out:** The RJ45 port is connected to the HDBaseT Input port of the receiver by a CAT Ethernet cable. The LINK LED illuminates when there is a valid HDBaseT link between the transmitter and receiver. The HDCP LED illuminates when the video contains HDCP content, or blinks when the video is transmitted without HDCP content.

TPHD460S

79086S User Manual

4.2 Receiver

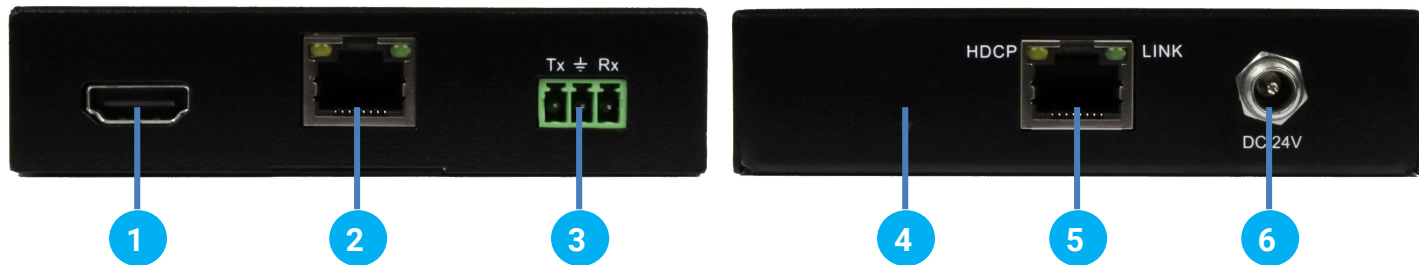

1. **HDMI Out:** Connects to HDMI display device (e.g. projector)
2. **Ethernet:** Used for Ethernet extension together with the Ethernet port of the transmitter. If one Ethernet port is connected to a router, the other is able to access the LAN network
3. **RS-232:** Connects the display device (e.g. projector) to be controlled by a far-end control device, or connects a control device (e.g. PC) to control a far-end source device (e.g. camera)
4. **Power LED:** Illuminates green when power is applied
5. **HDBaseT In:** The RJ45 port is connected to the HDBaseT output port of the transmitter by a CAT Ethernet cable. The LINK LED illuminates when there is a valid HDBaseT link between the transmitter and receiver. The HDCP LED illuminates when the video contains HDCP content, or blinks when the video is transmitted without HDCP content.
6. **DC 24V:** DC Connector for the power adapter connection

TPHD460S

79086S User Manual

5. Specifications

Transmitter	
Input	HDMI IN (19-pin type-A female HDMI)
Output	HDBT OUT (RJ45)
Control	ETHERNET (RJ45), RS-232 (3-pin terminal block)
Power Output	CAM 12V (2-pin terminal block)
Receiver	
Input	HDBT IN (RJ45)
Output	HDMI OUT (19-pin type-A female HDMI)
Control	ETHERNET (RJ45) RS-232 (3-pin terminal block)
General	
Video Resolution	Up to 4K@60Hz 4:2:0
Transmission Distance	4K/1080p ≤ 328 feet (100m)
HDMI Version	1.4
HDCP Version	Up to 2.2, bypass
EDID	Bypass
Power Supply	Input: 100 to 240V AC, 50/60Hz Output: DC 24V, 2.71A
Maximum Power Consumption	62W
Operation Temperature	23 ~ 131°F (-5 ~ 55°C)
Storage Temperature	-13 ~ 158°F (-25 ~ 70°C)
Relative Humidity	10% ~ 90%, Non-condensing
Dimensions (W*H*D)	3.94" (100mm) x 0.94" (24mm) x 16.3" (60mm)
Net Weight	Tx: 0.82 lbs. (370g) Rx: 0.84 lbs. (380g)