


The Single Projection Drop-In uses a unique presentation switcher with HDBaseT receiver. This presentation switcher has 4 HDMI, 4 VGA, 2 Video, and 1 Component inputs and has HDMI, HDBaseT, and VGA out. Control information is carried across the HDBaseT cable to the TekMonitor in the ceiling box, allowing for only a single Cat 5e cable to be installed into the ceiling box. For user control, a simple touch screen is used called the TekTouch. Typical configuration of the TekTouch allows for powering on and off the display, selecting PC, Laptop HDMI and VGA, Document Camera, DVD, VCR, Volume control of sources, Volume control of microphones, Picture Mute, and Picture Freeze. Other options such as lighting control can easily be added.

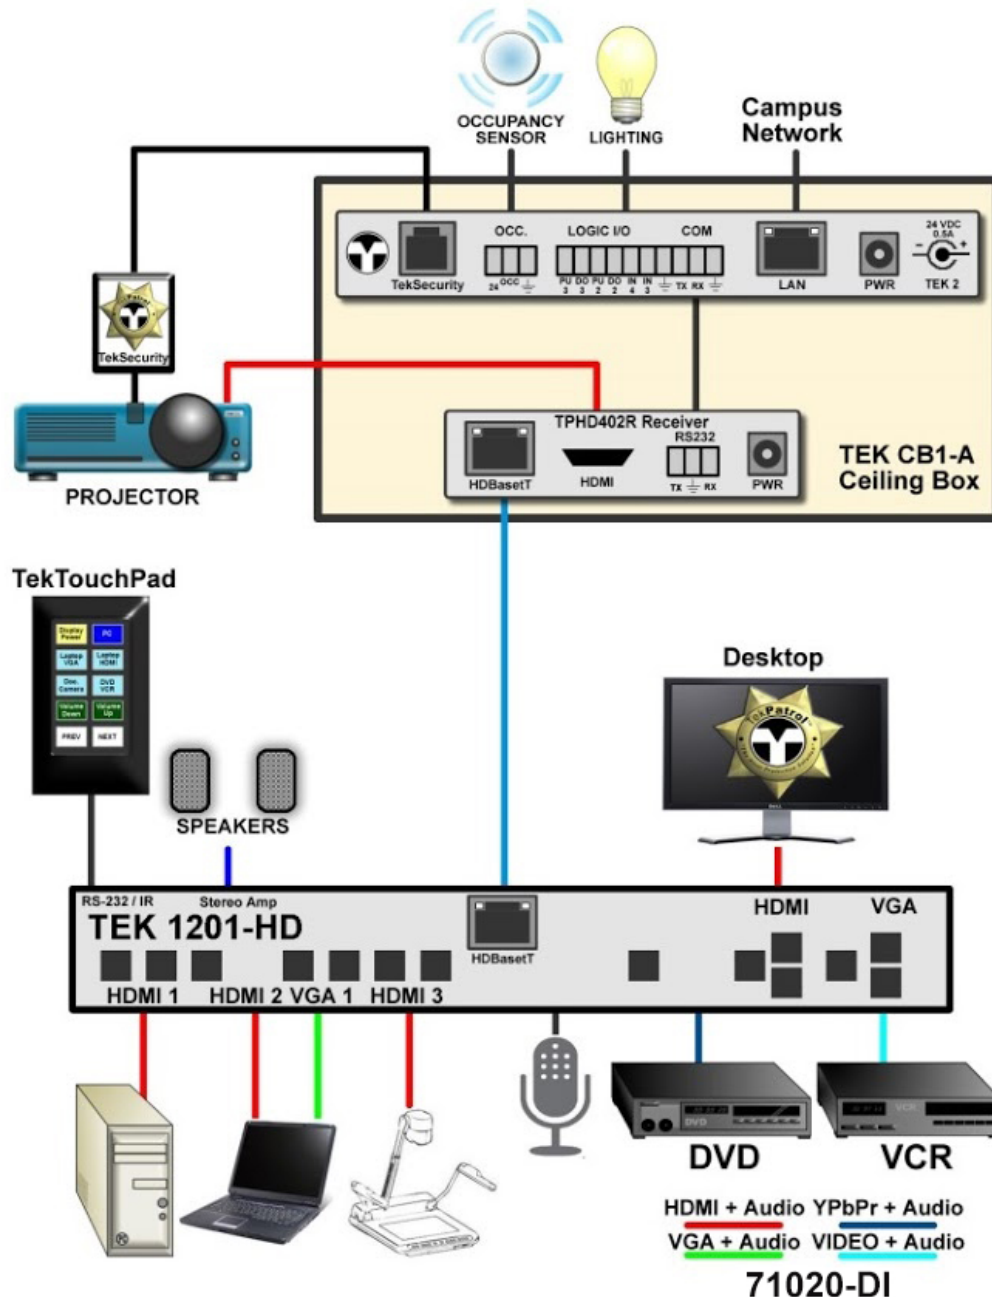

Included in an 71020-DI Single Projection Drop-In:

Description	Qty.
TekMonitor Room Controller	1
TekMonitor Power Supply	1
TekSecurity With 4' RJ12 Cable	1
TekSecurity Cable for projector	1
Large Room Occupancy Sensor	1
Tek CB1-A Ceiling Box	1
TSC7 Cable Management Housing	1
Multi-Input Presentation Switch	1
TekTouch	1
TekTouch Wedge	1
TEKVOX Single-Client Perpetual License	1

*TekSecurity cables are ordered for the different types of displays.