


The TEK LR-DA14 is a long range HDBase-T distribution amplifier for transmitting an HDMI source to four remote displays up to 150 meters away. The LR-DA14 accepts a single HD or UHD HDMI input and outputs a mirrored HDMI and four HD HDBase-T outputs. The product includes four compatible receivers and endpoints can be controlled via IR remote control or RS-232 serial interface.

**Features**

- 1 HDMI Input, 1 HDMI output with internal scaling, up to 4Kx2K @ 30Hz resolution
- 4 HDBaseT outputs, including mirrored serial commands and 1080p @ 60Hz resolution
- 4 included HDBaseT receivers with RS232 and HDMI out, compatible with POE
- Controllable via IR remote control or simple RS232 serial control for easy install
- Low power consumption, compact design, and sleek all-metal chassis

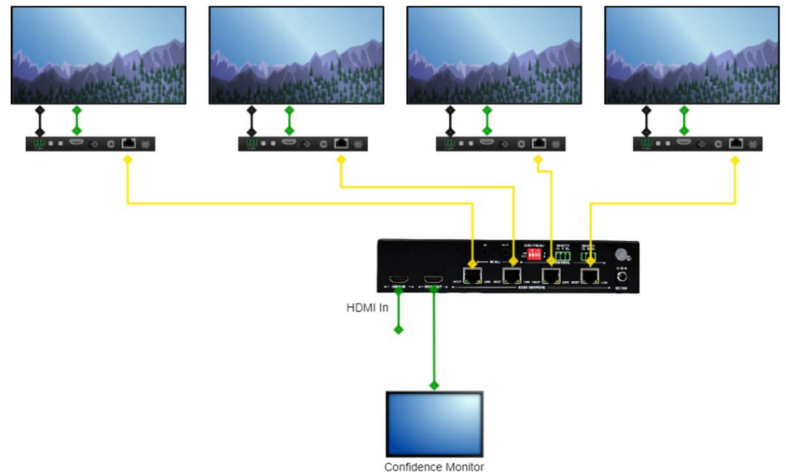

## Device Technical Specifications

<b>Video Input</b>	
Input	(1) HDMI
Input Connector	(1) Female Type A HDMI
Input Video signal	HDMI
HDMI Input Resolution	Up to 4Kx2K@30Hz
<b>Video Output</b>	
Output	(1) HDMI; (4) HDBT
Output Connector	(1) Female Type A HDMI; (4) RJ45
Output Video Signal	HDMI; HDBaseT
HDMI Output Resolution	Up to 4Kx2K@30Hz
HDBT Output Resolution	Up to 1080p@60Hz
<b>Control</b>	
Control Port	(1) EDID; (1) EDID PRESET; (1) IR ALL IN; (1) IR ALL OUT; (1) REMOTE; (1) MASTER
Control Connector	(1) 3-pin DIP switch; (1) 4-pin DIP switch; (2) 3.5mm mini jacks; (2) 3-pin Phoenix connectors
<b>General</b>	
Transmission Mode	HDBaseT
Transmission Distance	1080p ≤ 492 feet (150 meters)
Operating Temperature	0 ~ +40°C
Storage Temperature	-10 ~ +55°C
Relative Humidity	10% ~ 90%
AC Adapter Input Power	100V~240V AC, 50/60Hz
Input Power	24 VDC, 2.71 A
Power Consumption	35W (Max)
Dimension (W x H x D)	219mm x 44mm x 157.5mm
Net Weight	1.24 kg (2.75 lbs)