


TFX-ISD

79214 Data Sheet

The TFX-ISD is an input card that works with the TekFlex-16 and TekFlex-32 Chassis. The card supports an SDI input, along with an SDI loop output.

Features:

- SDI Input and SDI Loop output
- Capable of resolutions up to full 1080P
- Transmission distances of up to 100m (325 ft)
- Maximum power consumption of only 6.1W
- Compatible with any input slot of TekFlex-16 or -32 flexible matrix switchers
- Shipped fully functional, pre-programmed, and rigorously tested

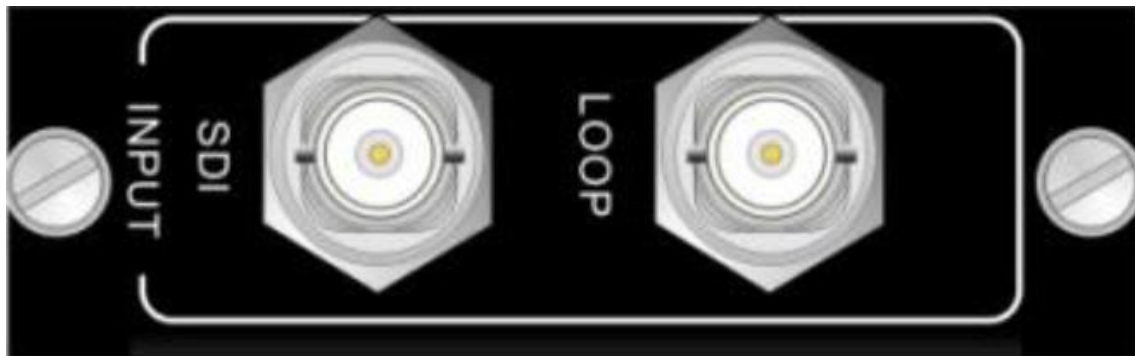

TFX-ISD

79214 Technical Specifications

Input	1 SDI (BNC, Female)
Output	1 SDI Loop (BNC, Female)
Signal Format	3G-SDI/HD-SDI/SDI
Supported Resolutions	Up to 1920x1080p
Transmission Distance	Up to 325 ft. (100m)
Power Consumption	6.1W (max)
Temperature	32 ~ 122°F (0 ~ 50°C)
Humidity	10 ~ 90%

Specifications are subject to change without notice