

# ShareView Wireless Pro


## 79060-WPSPro Data Sheet

The ShareView Wireless Pro offers professional-quality presentation, multiview, and BYOD video conferencing, all completely wireless. Users can wirelessly present content from their HDMI or USB-C laptop, from an Apple device via Airplay, or from an Android device using a free app. The ShareView Wireless Pro supports full-4K resolution, up to 16 users presenting simultaneously, and seamless switching. Laptops connected wirelessly to a display via the ShareView Wireless Pro can access any USB cameras or microphones connected to the base receiver unit. Presenters can control any wirelessly-connected device via an interactive display or a mouse connected to the base unit.

With the ShareView Wireless Pro, users can enjoy wireless, plug-and-play, seamless presentation and BYOD video conferencing with a wealth of premium features and advanced functionality.

### Features:

- Wireless BYOD video conferencing and local presentation
- Plug-and-play operation with HDMI & USB-C hardware transmitters
- Supports Apple Airplay, Android Miracast, and Chromecast
- USB feedback for wireless control of devices from interactive displays
- Supports HDMI 2.0 and video output resolutions up to 4K@60Hz
- View up to 4 sources simultaneously for seamless, wireless collaboration
- Shipped fully functional, pre-programmed, and rigorously tested

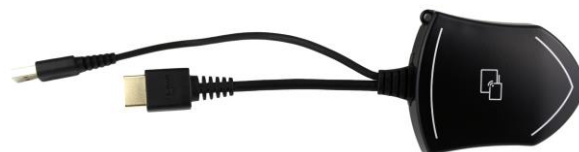

HDMI + USB-A Wireless Transmitter



USB-C Wireless Transmitter



WirelessMedia2 app for Android



AirPlay for Apple

# ShareView Wireless Pro

## 79060-WSPPro Technical Specifications

|                                       |                                                                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Video Output</b>                   | 1 HDMI (19-pin, Female)                                                                                                                                                |
| <b>Output Resolution</b>              | 3840x2160 @ 60Hz, 3840x2160 @ 30Hz, 1920x1080 @ 60Hz, 1280x720 @ 60Hz                                                                                                  |
| <b>Supported Input Resolutions</b>    | Airplay (iOS): 1080p @ 60Hz<br>WirelessMedia app (Android): 1080p @ 60Hz<br>HDMI/USB-C Hardware Transmitters: 1080p @ 60Hz<br>USB-A Hardware Transmitter: 1080p @ 30Hz |
| <b>Simultaneous Connections</b>       | 16 (4 main window + 12 thumbnails)                                                                                                                                     |
| <b>Video Playback Frame Rate</b>      | 20 ~ 60 FPS                                                                                                                                                            |
| <b>Audio Input</b>                    | Airplay/Miracast/Chromecast, Windows/MAC, WMH, USB/BT speaker phone                                                                                                    |
| <b>Audio Output</b>                   | 1 LINE Out (3.5mm mini jack)<br>1 HDMI<br>USB/BT speaker phone                                                                                                         |
| <b>USB Interface</b>                  | 3 USB 3.0 (Type-A, Female)<br>1 USB 3.0 (Type-C, Female)<br>1 USB 2.0 (Type-A, Female)<br>1 USB 2.0 (Type-C, Female)                                                   |
| <b>USB Camera Resolution</b>          | ≤ 1080p @ 30Hz (MJPG)                                                                                                                                                  |
| <b>Latency</b>                        | 20 ~ 100 ms                                                                                                                                                            |
| <b>Wi-Fi Data Rate</b>                | ≤ 1200 Mbps                                                                                                                                                            |
| <b>Wireless Transmission Protocol</b> | Wi-Fi IEEE 802.11 b/g/n/ac                                                                                                                                             |
| <b>Frequency Band</b>                 | 2.4 GHz & 5 GHz                                                                                                                                                        |
| <b>Wi-Fi Encryption</b>               | AES WPA PSK, WPA2 PSK                                                                                                                                                  |
| <b>Control Interface</b>              | 2 LAN (RJ-45, Female, 1000Mbps/100Mbps)<br>RS-232 (3-pin screw terminal)                                                                                               |
| <b>Control Method</b>                 | Web GUI, Telnet, RS-232                                                                                                                                                |
| <b>Operating Temperature</b>          | -4 ~ 113°F (-20 ~ 45°C)                                                                                                                                                |
| <b>Storage Temperature</b>            | -4 ~ 140°F (-20 ~ 60°C)                                                                                                                                                |
| <b>Relative Humidity</b>              | 20 ~ 85% (non-condensing)                                                                                                                                              |
| <b>Power Supply</b>                   | <b>Input:</b> 100 ~ 240VAC, 50/60Hz<br><b>Output:</b> DC 12V, 1.5A<br>OR<br>PoE (IEEE2.3AF or IEEE802.3AT)                                                             |
| <b>Power Consumption</b>              | 10W (max)                                                                                                                                                              |
| <b>Product Dimensions</b>             | 8.66" (220mm) x 4.72" (120mm) x 1.61" (41mm)                                                                                                                           |
| <b>Product Weight</b>                 | 2.09 lbs. (950g)                                                                                                                                                       |
| <b>Compliances</b>                    | HDMI 1.4, HDMI 2.0, HDCP 1.4, HDCP 2.2                                                                                                                                 |

Specifications are subject to change without notice