

# TekTouchPad - Podium

## 78034 Installation Guide

### Included in this Product Package:



TekTouchPad



#6 Wood  
Screws (4)



6-32 Machine  
Screws (2)



Back Mounting  
Plate



Mounting Wedge




4-pin/RJ12  
Serial Cable

### Step 1: Select Location for TekTouchPad

The TekTouchPad mounting wedge should be placed on the podium or table so that it is comfortably accessible, and does not obstruct any displays or monitors. There must be at least 3" to either side of the wedge to allow for normal usage. The wedge is approximately 4-3/4" long & 2-13/16" wide.


### Step 2: Drill Screw & Cable Passthrough Holes

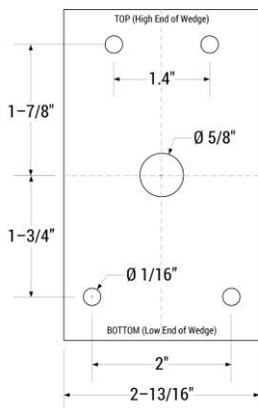

With the TekTouchPad mounting wedge in its intended location, lightly trace around its perimeter with a pencil. Remove the wedge, and mark the positions of all five (5) holes shown on the hole template. When mounted, the lower end of the angled wedge face should be facing towards the user.

Using a 1/16" bit, drill the four (4) holes—one in each corner—for mounting the wedge to a depth of 1/2". Next, use a 5/8" bit to drill the central cable passthrough hole all the way through the table surface. Clean away all sawdust and/or debris from the drilling process.

### Step 3: Attach Mounting Wedge to Table

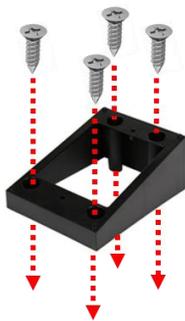

Using the four (4) provided wood screws, attach the TekTouchPad mounting wedge to the table. With the taller end of the wedge facing away from the user, the four mounting posts on the wedge should align with the 1/16" holes drilled in Step 2.

Tighten screws until snug, but do not overtighten, as this can damage the wedge. Ensure that the wedge is stable before proceeding.

# TekTouchPad - Podium

## 78034 Installation Guide


### Step 4: Fasten Back Mounting Plate to Wedge



Using the two (2) provided machine screws, attach the back mounting plate to the angled face of the wedge. Ensure that the "↑TOP↑" text on the back mounting plate is facing upwards, and that the arrows point towards the taller end of the wedge.

Be very careful *not to overtighten these screws*, as this can warp the plate and prevent the TekTouchPad from seating properly.

### Step 5: Route Cable up through Mounting Wedge

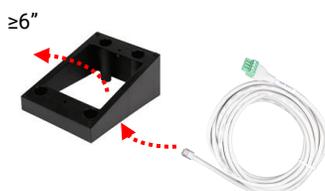

Route clear plastic RJ12 head of serial cable from underneath table surface through 5/8" hole drilled in Step 2. Run cable out through rectangular opening in mounting wedge, with at least 6" of slack.

### Step 6: Connect & Mount TekTouchPad



Connect clear plastic RJ12 head of serial cable to port on back of TekTouchPad. Ensure that the head clicks into place.

Orient the TekTouchPad such that the cable runs directly downward, and the wider portion of the housing is lower. Gently push the TekTouchPad towards the mounting wedge, ensuring that the cable does not get pinched, kinked, or bent too sharply.

Align the four posts of the back mounting plate with the four holes on the back of the TekTouchPad housing. Once aligned, push the TekTouchPad towards the mounting plate until mounted securely. Check that the TekTouchPad does not move when pressed.

### Step 7: Finalize Cabling



Plug green 4-pin connector of serial cable into RS232 port of 1201-MV

Ensure that all cables are neatly routed, and that any excess length is neatly coiled without obstructing access to any equipment.

