

ShareView Wireless Pro


79060-WSPPro Data Sheet

The ShareView Wireless Pro offers professional-quality presentation, multiview, and BYOD video conferencing, all completely wireless. Users can wirelessly present content from their HDMI or USB-C laptop, from an Apple device via Airplay, or from an Android device using a free app. The ShareView Wireless Pro supports full-4K resolution, up to 16 users presenting simultaneously, and seamless switching. Laptops connected wirelessly to a display via the ShareView Wireless Pro can access any USB cameras or microphones connected to the base receiver unit. Presenters can control any wirelessly-connected device via an interactive display or a mouse connected to the base unit.

With the ShareView Wireless Pro, users can enjoy wireless, plug-and-play, seamless presentation and BYOD video conferencing with a wealth of premium features and advanced functionality.

Features:

- Wireless BYOD video conferencing and local presentation
- Plug-and-play operation with HDMI & USB-C hardware transmitters
- Supports Apple Airplay, Android Miracast, and Chromecast
- USB feedback for wireless control of devices from interactive displays
- Supports HDMI 2.0 and video output resolutions up to 4K@60Hz
- View up to 4 sources simultaneously for seamless, wireless collaboration
- Shipped fully functional, pre-programmed, and rigorously tested

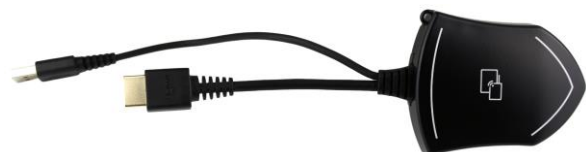

HDMI + USB-A Wireless Transmitter



USB-C Wireless Transmitter



WirelessMedia2 app for Android



AirPlay for Apple

ShareView Wireless Pro

79060-WSPPro Technical Specifications

Video Output	1 HDMI (19-pin, Female)
Output Resolution	3840x2160 @ 60Hz, 3840x2160 @ 30Hz, 1920x1080 @ 60Hz, 1280x720 @ 60Hz
Supported Input Resolutions	Airplay (iOS): 1080p @ 60Hz WirelessMedia app (Android): 1080p @ 60Hz HDMI/USB-C Hardware Transmitters: 1080p @ 60Hz USB-A Hardware Transmitter: 1080p @ 30Hz
Simultaneous Connections	16 (4 main window + 12 thumbnails)
Video Playback Frame Rate	20 ~ 60 FPS
Audio Input	Airplay/Miracast/Chromecast, Windows/MAC, WMH, USB/BT speaker phone
Audio Output	1 LINE Out (3.5mm mini jack) 1 HDMI USB/BT speaker phone
USB Interface	3 USB 3.0 (Type-A, Female) 1 USB 3.0 (Type-C, Female) 1 USB 2.0 (Type-A, Female) 1 USB 2.0 (Type-C, Female)
USB Camera Resolution	≤ 1080p @ 30Hz (MJPG)
Latency	20 ~ 100 ms
Wi-Fi Data Rate	≤ 1200 Mbps
Wireless Transmission Protocol	Wi-Fi IEEE 802.11 b/g/n/ac
Frequency Band	2.4 GHz & 5 GHz
Wi-Fi Encryption	AES WPA PSK, WPA2 PSK
Control Interface	2 LAN (RJ-45, Female, 1000Mbps/100Mbps) RS-232 (3-pin screw terminal)
Control Method	Web GUI, Telnet, RS-232
Operating Temperature	-4 ~ 113°F (-20 ~ 45°C)
Storage Temperature	-4 ~ 140°F (-20 ~ 60°C)
Relative Humidity	20 ~ 85% (non-condensing)
Power Supply	Input: 100 ~ 240VAC, 50/60Hz Output: DC 12V, 1.5A OR PoE (IEEE2.3AF or IEEE802.3AT)
Power Consumption	10W (max)
Product Dimensions	8.66" (220mm) x 4.72" (120mm) x 1.61" (41mm)
Product Weight	2.09 lbs. (950g)
Compliances	HDMI 1.4, HDMI 2.0, HDCP 1.4, HDCP 2.2

Specifications are subject to change without notice