


ShareView Adapter

79060 Data Sheet

The TEKVOX ShareView Adapter is an affordable HDMI to USB capture device with audio insertion and de-embedding, as well as an HDMI splitter. The ShareView Adapter allows users to connect an external HDMI and audio source to a PC for easy video conferencing or recording. Simultaneously, the ShareView Adapter can output HDMI video to a confidence monitor and send audio to a speaker system. The audio source is selectable via USB from the connected computer.

Features:

- HDMI Input & loop output support HDMI 2.0, HDCP 2.2, and up to 4Kx2K@50/60Hz 4:2:2
- Converts HDMI Input to USB Capture Output at up to 1080p@60Hz
- Features stereo audio insertion & extraction
- USB 3.0 data transmission rate up 350MBps
- Plug-and-play installation w/ no driver or programming required
- Shipped fully functional, pre-programmed, and rigorously tested

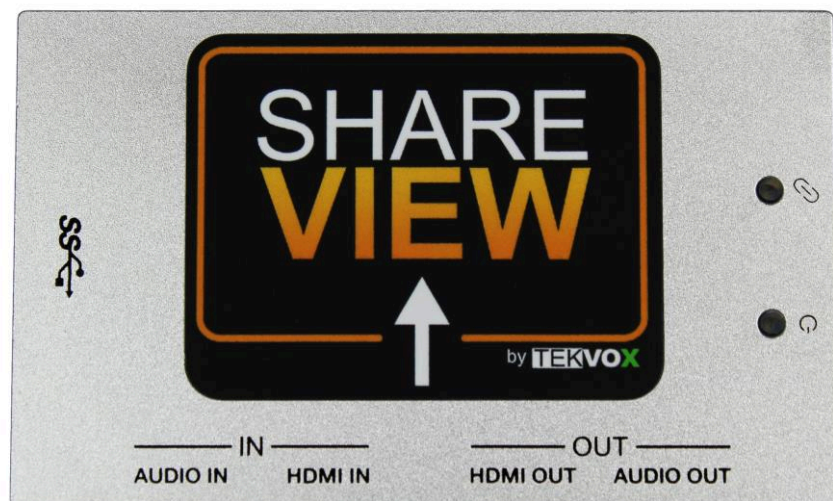

ShareView Adapter

79060 Technical Specifications

Inputs	1 HDMI IN (19-pin, Female) 1 Stereo Audio, Unbalanced (3.5mm mini jack)
Outputs	1 HDMI Loop OUT (19-pin, Female) 1 Stereo Audio, Unbalanced (3.5mm mini jack) 1 USB CAPTURE OUT (USB 3.0, Type-A Female)
HDMI Input Resolution	Up to 4Kx2K@30Hz 4:4:4
HDMI Loop Output Resolution	Up to 4Kx2K@60Hz 4:4:4
USB Capture Resolution	Up to 1080p@60Hz
Audio & Video Capture	UVC (USB Video Class) & UAC (USB Audio) standard
Supported OS	Windows 7/8/10, Linux (Kernel version 2.6.38 & above), OS X (10.8 & above)
Temperature	32 ~ 104°F (0 ~ 40°C)
Humidity	20 ~ 90%
Power Supply	Powered via USB connection
Power Consumption	3.4W (max)
Product Dimensions	3.86" (98mm) x 2.36" (60mm) x 0.67" (17mm)
Product Weight	0.275 lbs. (125g)

Specifications are subject to change without notice

